




MAXsterile

User brochure

An all-in-one instrument set,
six screw types and
an innovative sterile implant system.
For efficient small fragment treatment
from clavicle to forefoot.

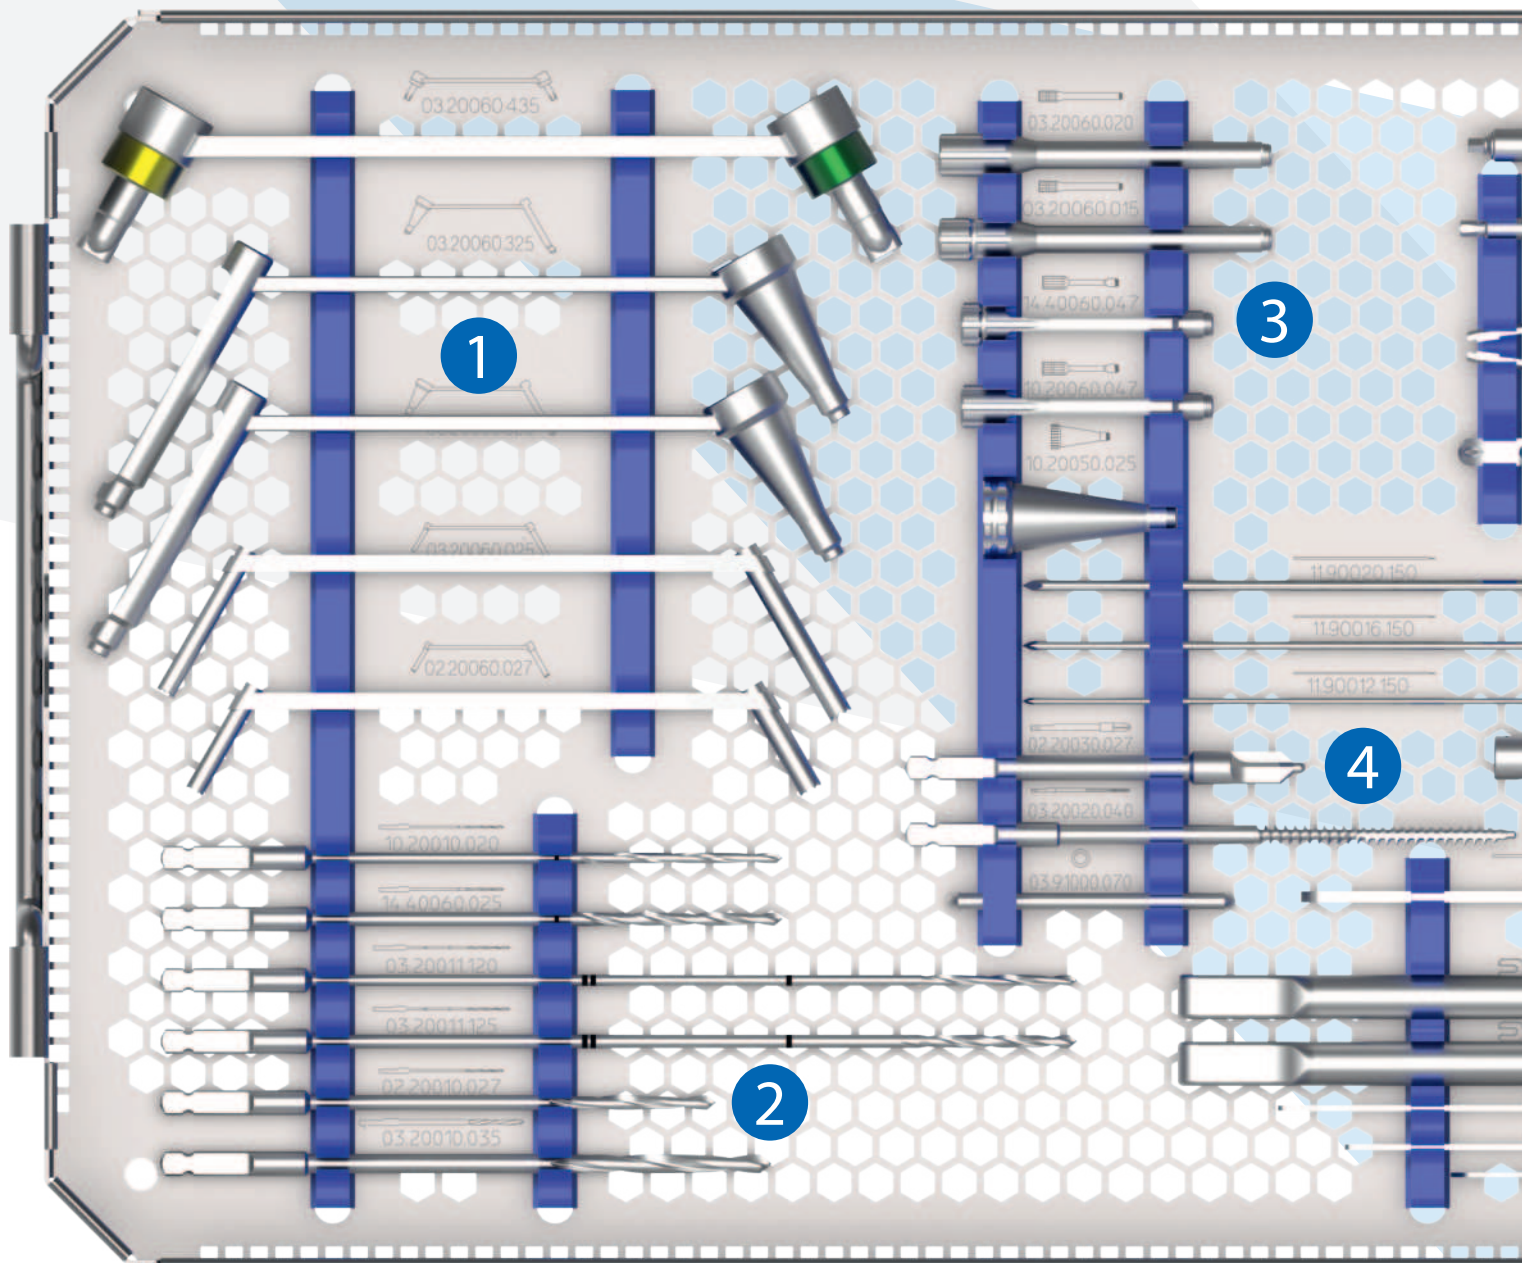

03.22140.400 Locking Small Fragment Container, Universal Instruments

1 Double Drill Guide

03.20060.435	Drill Guide 2.5, Neutral and Load Position, for Low Contact Plates
03.20060.325	Double Drill Guide 2.5/ML
03.20060.320	Double Drill Guide 2.0/ML
03.20060.025	Double Drill Guide 3.5/2.5
02.20060.027	Double Drill Guide 2.7/2.0

2 Drill Bit


10.20010.020	Drill Bit \varnothing 2.0 mm, AO Coupling, L 112/82 mm
14.40060.025	Drill Bit \varnothing 2.5 mm, AO Coupling, L 112/82 mm
03.20011.120	Drill Bit \varnothing 2.0 mm, AO Coupling, L 165/135 mm
03.20011.125	Drill Bit \varnothing 2.5 mm, AO Coupling, L 165/135 mm
02.20010.027	Drill Bit \varnothing 2.7 mm, AO Coupling, L 100/70 mm
03.20010.135	Drill Bit \varnothing 3.5 mm, AO Coupling, L 195/165 mm

3 Drill Guide

03.20060.020	Drill Guide 2.5 for Locking Plates
03.20060.015	Drill Guide 2.0 for Locking Plates
14.40060.047	Drill Guide 2.5, scaled
10.20060.047	Drill Guide 2.0, scaled
10.20050.025	ML Drill Guide 2.0

4 Kirschner Wire, Countersink, Tap

11.90020.150	Kirschner Wire \varnothing 2.0 mm, Trocar Tip, L 150 mm
11.90016.150	Kirschner Wire \varnothing 1.6 mm, Trocar Tip, L 150 mm
11.90012.150	Kirschner Wire \varnothing 1.2 mm, Trocar Tip, L 150 mm
02.20030.027	Countersink 2.7/3.5/4.0, AO Coupling
03.20020.040	Tap for Cancellous Bone Screws \varnothing 4.0 mm, AO Coupling, L 110/80 mm

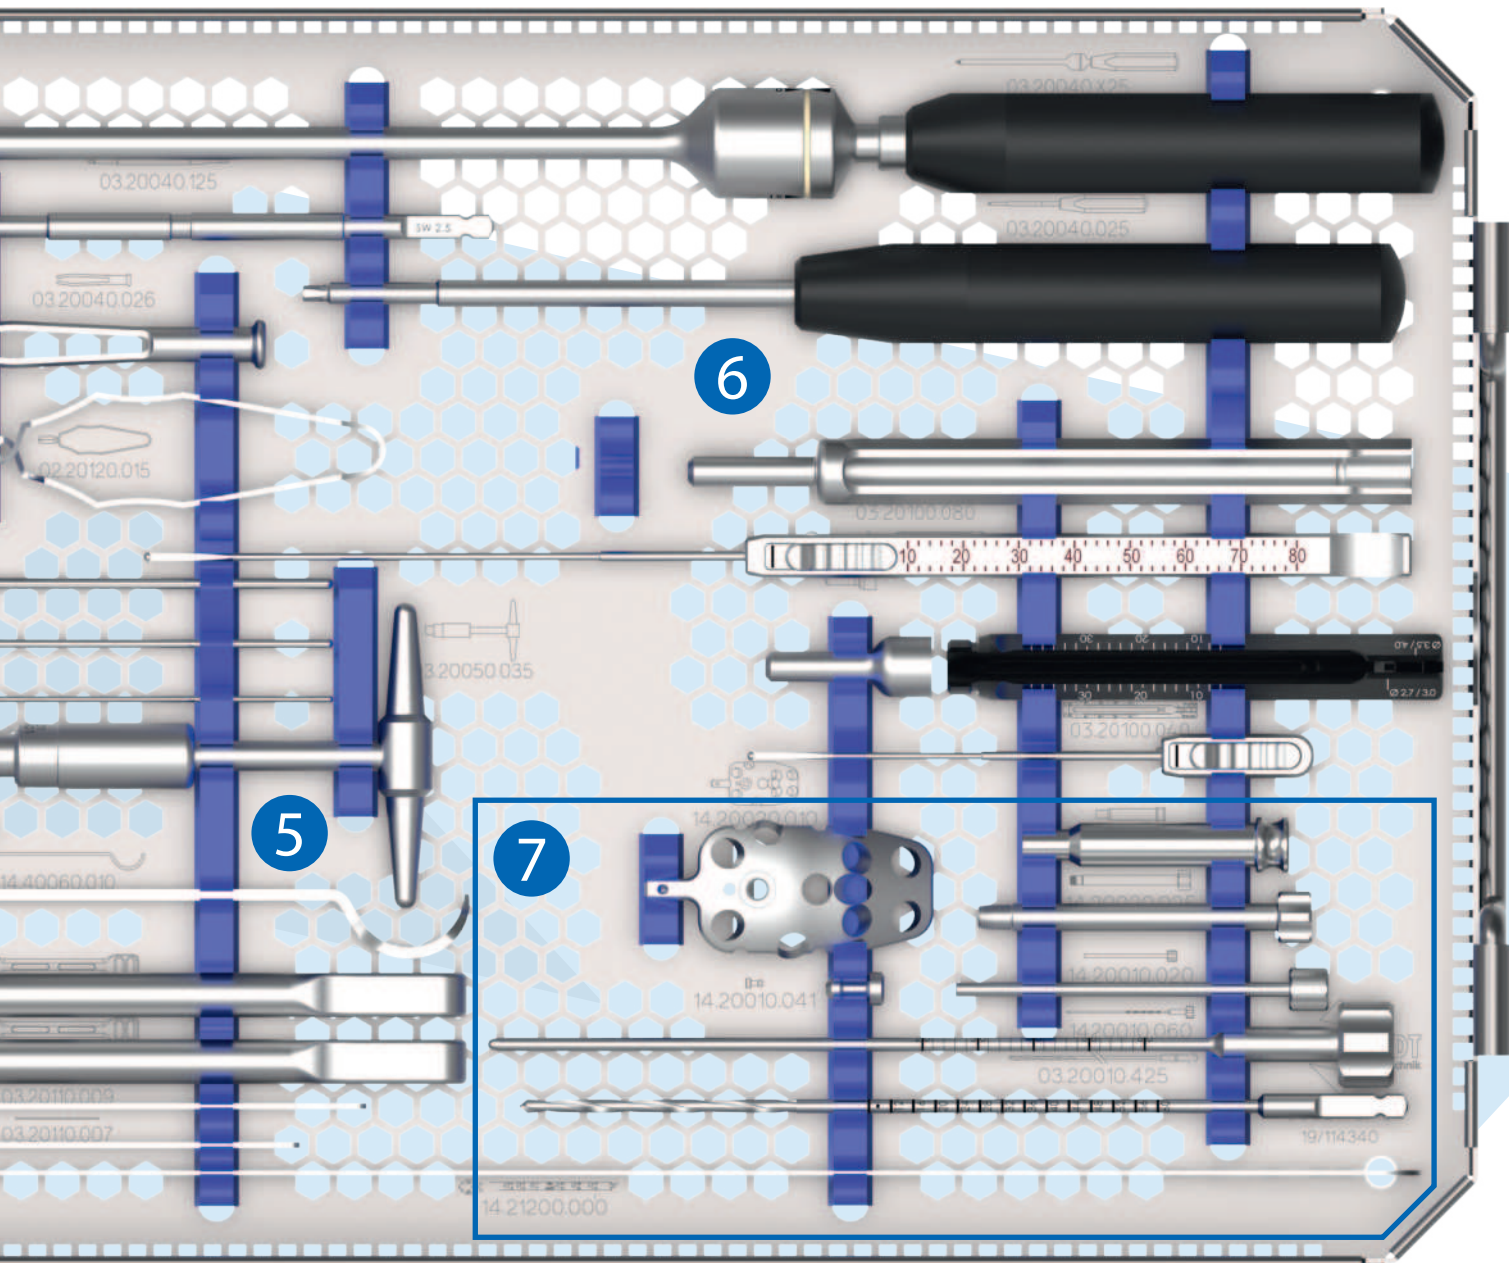

5 T-Handle, Clavicle Retractor, Bending Iron, Bending Template

03.20050.035	T-Handle with AO Coupling
14.40060.010	Clavicle Retractor
03.20110.035	Bending Iron for Plates 2.7 bis 3.5, right
03.20110.135	Bending Iron for Plates 2.7 bis 3.5, left
03.20110.009	Bending Template for Compression Plates 3.5, 9 Holes
03.20110.007	Bending Template for Compression Plates 3.5, 7 Holes

6 Torque Screwdriver, Screwdriver, Screw Forceps, Length Determination Instrument

03.20040.325	Torque Screwdriver, hex 2.5 mm, short
03.20040.125	Screwdriver Shaft, hex 2.5 mm, AO Coupling, L 100/70 mm
03.20040.025	Screwdriver, hex 2.5 mm, L 200/85 mm
03.20040.026	Holding Sleeve for Screws \varnothing 2.7-4.0 mm
02.20120.015	Screw Forceps, self-holding
03.20100.080	Length Determination Instrument for Screws up to 80 mm
03.20100.040	Length Determination Instrument for Screws up to 40 mm


7 WINSTA-PH2 Instruments

14.20020.010	WINSTA-PH2 Guiding Block
14.20010.041	WINSTA-PH2 Assembling Screw for REF 14.20020.010
14.20020.020	WINSTA-PH2 Guide Sleeve \varnothing 5.0
14.20020.025	WINSTA-PH2 Drill Guide 2.5, for Locking Plates
14.20010.020	WINSTA-PH2 Centering Sleeve for Kirschner Wire \varnothing 1.6 mm
14.20010.060	WINSTA-PH Length Determination Instrument for Screws up to 60 mm
03.20010.425	Drill Bit \varnothing 2.5 mm, scaled, AO Coupling, L 160/130 mm
14.21200.000	WINSTA-PH2 X-Ray Template

MAXsterile
Universal Instruments

WINSTA-C

Locking Clavicle Plates

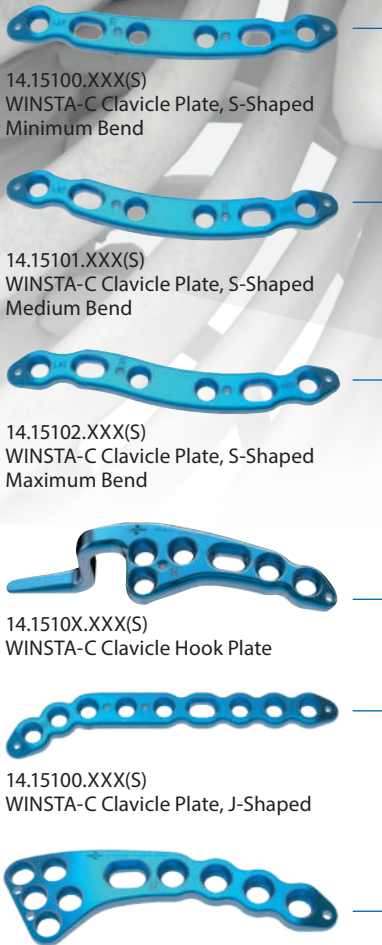

14.15100.XXX(S)
WINSTA-C Clavicle Plate, S-Shaped
Minimum Bend

14.15101.XXX(S)
WINSTA-C Clavicle Plate, S-Shaped
Medium Bend

14.15102.XXX(S)
WINSTA-C Clavicle Plate, S-Shaped
Maximum Bend

14.1510X.XXX(S)
WINSTA-C Clavicle Hook Plate

14.15100.XXX(S)
WINSTA-C Clavicle Plate, J-Shaped

14.15103.XXX(S)
WINSTA-C Lateral Clavicle Plate



03.03527.XXX(S)
Cortical Screw Ø 2.7 mm



03.05527.XXX(S)
Locking Cortical Screw Ø 2.7 mm




03.03540.XXX(S)
ML Cortical Screw Ø 2.7 mm



03.03612.XXX(S)
Cortical Screw Ø 3.5 mm



03.05612.XXX(S)
Locking Cortical Screw Ø 3.5 mm




02.20060.027
Double Drill Guide 2.7/2.0



10.20060.047
Drill Guide 2.0, scaled



10.20050.025
ML Drill Guide 2.0




03.20060.025
Double Drill Guide 3.5/2.5



14.40060.047
Drill Guide 2.5, scaled

10.20010.020
Drill Bit
Ø 2.0 mm
L 112/82 mm

14.40060.025
Drill Bit
Ø 2.5 mm
L 112/82 mm



Multiaxial Locking Treatment
With a cylindrical plate hole, the **ML Screw** enables a multiaxial locking treatment



03.20100.040
Length Determination Instrument for Screws up to 40 mm



03.20040.025
Screwdriver, hex 2.5 mm, L 200/85 mm




self-holding



WINSTA-PH2

Locking Proximal Humeral Plates

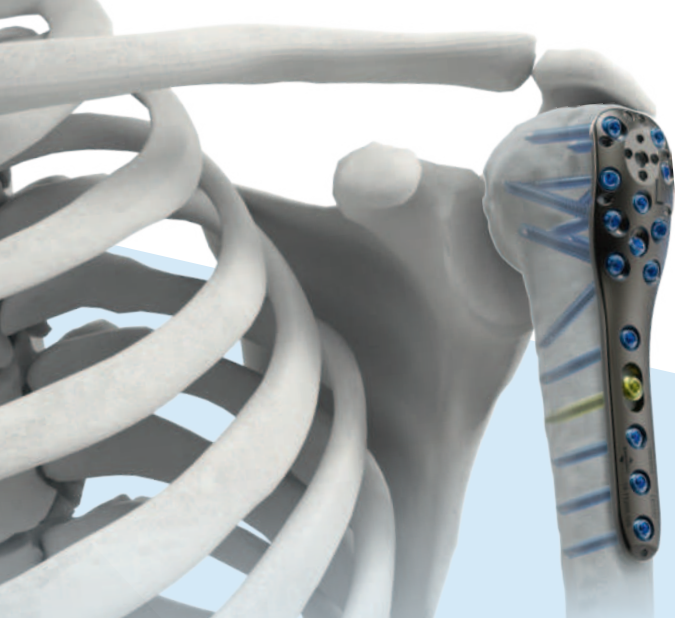


14.11200.XXXS
WINSTA-PH2
Proximal Humeral Plate




03.03612.XXX(S)
Cortical Screw Ø 3.5 mm



03.05612.XXX(S)
Locking Cortical Screw Ø 3.5 mm



03.05640.XXXS
Locking Cancellous Bone Screw
Ø 4.0 mm



03.20060.025
Double Drill Guide 3.5/2.5



14.21200.000
WINSTA-PH2 X-Ray Template



14.20020.010
WINSTA-PH2 Guide Block




14.20010.041
WINSTA-PH2 Assembling Screw for
REF 14.20020.010



14.20020.020
WINSTA-PH2 Guide Sleeve Ø 5.0



14.20020.025
WINSTA-PH2 Drill Guide 2.5, for
Locking Plates



14.20010.020
WINSTA-PH2 Centering Sleeve for
Kirschner Wire Ø 1.6 mm



14.20010.060
WINSTA-PH Length Determination Instrument
for Screws up to 60 mm

14.40060.025
Drill Bit
Ø 2.5 mm
L 112/82 mm

03.20010.425
Drill Bit
Ø 2.5 mm,
scaled,
L 160/130 mm

optional



03.20100.080
Length Determination Instrument for Screws up to 80 mm



03.20040.025
Screwdriver, hex 2.5 mm, L 200/85 mm




self-holding



WINSTA-E

Locking Elbow / Olecranon Plates

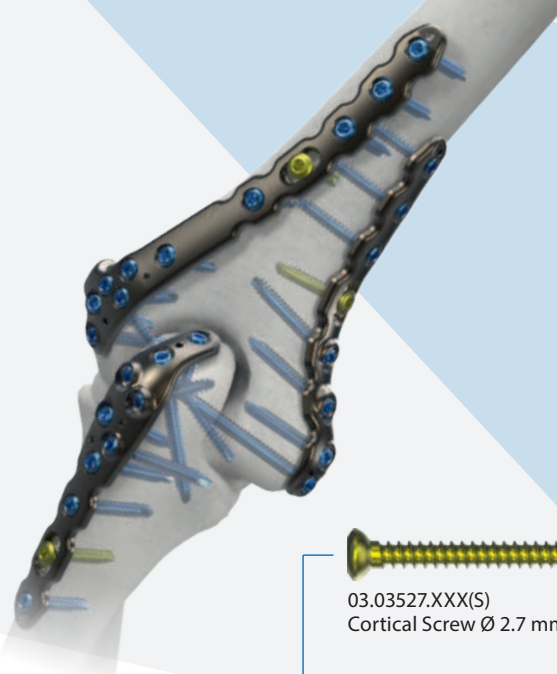

15.15100.XXXS
WINSTA-E Distal Humeral Plate
medial



15.15102.XXXS
WINSTA-E Distal Humeral Plate
lateral



15.15103.XXXS
WINSTA-E Distal Humeral Plate
posterolateral



15.15200.XXXS
WINSTA-E Olecranon Plate



03.03527.XXX(S)
Cortical Screw Ø 2.7 mm




03.05527.XXX(S)
Locking Cortical Screw Ø 2.7 mm




03.03612.XXX(S)
Cortical Screw Ø 3.5 mm



03.05612.XXX(S)
Locking Cortical Screw Ø 3.5 mm



02.20060.027
Double Drill Guide 2.7/2.0



10.20060.047
Drill Guide 2.0, scaled



03.20060.015
Drill Guide 2.0 for Locking Plates



03.20060.320
Double Drill Guide 2.0/ML



03.20060.025
Double Drill Guide 3.5/2.5



14.40060.047
Drill Guide 2.5, scaled



03.20060.020
Drill Guide 2.5 for Locking Plates



03.20060.325
Double Drill Guide 2.5/ML

10.20010.020
Drill Bit
Ø 2.0 mm
L 112/82 mm

03.20011.120
Drill Bit
Ø 2.0 mm
L 165/135 mm

14.40060.025
Drill Bit
Ø 2.5 mm
L 112/82 mm

03.20011.125
Drill Bit
Ø 2.5 mm
L 165/135 mm




Multiaxial Locking Treatment

The angular plate hole enables multiaxial insertion of the **Locking Cortical Screws**.

ML Screws are no longer required



self-holding



03.20100.040
Length Determination Instrument for Screws up to 40 mm



03.20100.080
Length Determination Instrument for Screws up to 80 mm



03.20040.025
Screwdriver, hex 2.5 mm, L 200/85 mm

WINSTA-R

Locking Distal Radius Plates



10.11915.1XX(S) **right** / .2XX(S) **left**
WINSTA-R Distal Radius Plate, 3-Hole



10.11915.3XX(S) **right** / .4XX(S) **left**
WINSTA-R Distal Radius Plate, 4-Hole



10.11915.6XX(S) **right** / .5XX(S) **left**
WINSTA-R Distal Radius Plate, 5-Hole



10.11915.8XX(S) **right** / .7XX(S) **left**
WINSTA-R Distal Radius Plate, 6-Hole



10.11917.0XX(S) **right** / .1XX(S) **left**
WINSTA-R Distal Radius Plate, 7-Hole



10.11917.2XX(S) **right** / .3XX(S) **left**
WINSTA-R Distal Radius Plate, 7-Hole narrow




10.11916.3XX(S) **right** / .4XX(S) **left**
WINSTA-R Distal Radius Plate, dorsal



10.11918.0XX(S) **right** / .1XX(S) **left**
WINSTA-R Distal Ulna Hook Plate



10.11918.007(S) **right** / .107(S) **left**
WINSTA-R Distal Ulna Plate



self-holding



03.03527.XXX(S)
Cortical Screw Ø 2.7 mm



02.20060.027
Double Drill Guide 2.7/2.0




03.05527.XXX(S)
Locking Cortical Screw Ø 2.7 mm



10.20060.047
Drill Guide 2.0, scaled



03.03540.XXX(S)
ML Cortical Screw Ø 2.7 mm



10.20050.025
ML Drill Guide 2.0

10.20010.020
Drill Bit
Ø 2.0 mm
L 112/82 mm



Multiaxial Locking Treatment
With a cylindrical plate hole, the **ML Screw** enables a multiaxial locking treatment



03.20100.040
Length Determination Instrument for Screws up to 40 mm



03.20040.025
Screwdriver, hex 2.5 mm, L 200/85 mm

WINSTA-FiT

Locking

Distal Fibula /Tibia Plates



13.15100.XXXS
WINSTA-FIT Distal Tibia Plate
medial



13.15200.XXXS
WINSTA-FIT Distal Tibia Plate
anterolateral



13.15300.XXXS
WINSTA-FIT Distal Tibia Plate
posterior



13.15500.XXXS
WINSTA-FIT Distal Fibula Plate
lateral



03.03527.XXX(S)
Cortical Screw Ø 2.7 mm



03.05527.XXX(S)
Locking Cortical Screw Ø 2.7 mm



03.03612.XXX(S)
Cortical Screw Ø 3.5 mm




03.05612.XXX(S)
Locking Cortical Screw Ø 3.5 mm



03.05640.XXXS
Locking Cancellous Bone Screw
Ø 4.0 mm



02.20060.027
Double Drill Guide 2.7/2.0



10.20060.047
Drill Guide 2.0, scaled




03.20060.015
Drill Guide 2.0 for Locking Plates



03.20060.320
Double Drill Guide 2.0/ML



03.20060.025
Double Drill Guide 3.5/2.5



14.40060.047
Drill Guide 2.5, scaled



03.20060.020
Drill Guide 2.5 for Locking Plates



03.20060.325
Double Drill Guide 2.5/ML

10.20010.020
Drill Bit
Ø 2.0 mm
L 112/82 mm

03.20011.120
Drill Bit
Ø 2.0 mm
L 165/135 mm

14.40060.025
Drill Bit
Ø 2.5 mm
L 112/82 mm

03.20011.125
Drill Bit
Ø 2.5 mm
L 165/135 mm




Multiaxial Locking Treatment

The angular plate hole enables multi-axial insertion of the **Locking Cortical Screws**.

ML Screws are no longer required



selbsthaltend



03.20100.040
Length Determination Instrument for Screws up to 40 mm




03.20100.080
Length Determination Instrument for Screws up to 80 mm



03.20040.025
Screwdriver, hex 2.5 mm, L 200/85 mm

PEDUS

Locking Fore- / Midfoot Plates

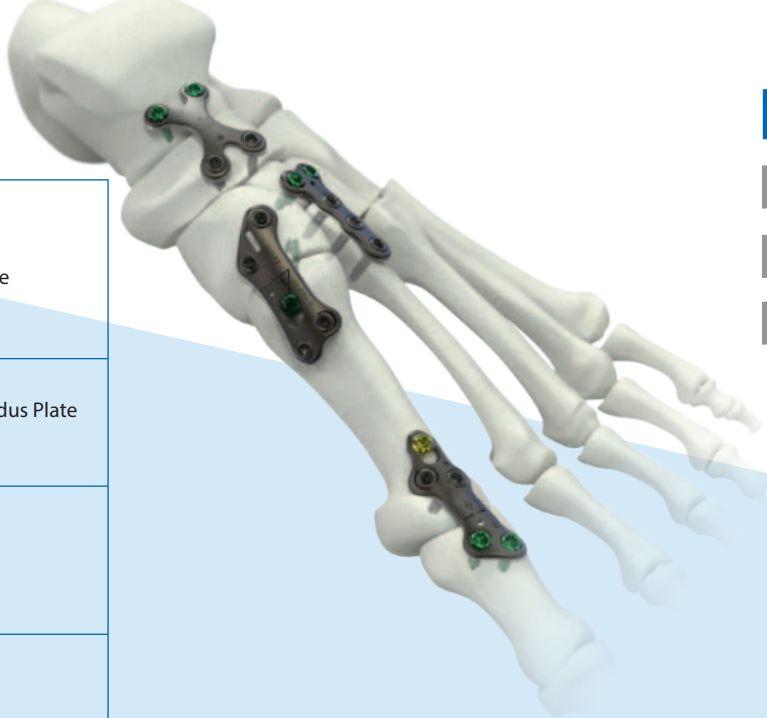

12.11123.XXX(S)
PEDUS-L Locking Lapidus Plate



12.11124.XXX(S)
PEDUS-L Locking Plantar Lapidus Plate



12.11210.XXX(S)
PEDUS Locking T-Plate



12.11211.XXX(S)
PEDUS Locking Plate, straight



12.11212.XXX(S)
PEDUS Locking L-Plate, 90°



12.11230.XXXS
PEDUS-Lx Compression Plate



12.1125X.XXXS
PEDUS MTP 1 Arthrodesis Plate, short



12.1125X.XXX(S)
PEDUS MTP 1 Arthrodesis Plate




12.11018.007(S)
PEDUS Locking Multifix Plate



12.11220.XXX(S)
PEDUS Locking X-Plate



03.03527.XXX(S)
Cortical Screw Ø 2.7 mm



02.20060.027
Double Drill Guide 2.7/2.0




03.05527.XXX(S)
Locking Cortical Screw Ø 2.7 mm




10.20060.047
Drill Guide 2.0, scaled

10.20010.020
Drill Bit
Ø 2.0 mm
L 112/82 mm



03.03540.XXX(S)
ML Cortical Screw Ø 2.7 mm



10.20050.025
ML Drill Guide 2.0



Multiaxial Locking Treatment
With a cylindrical plate hole, the **ML Screw** enables a multiaxial locking treatment



03.20100.040
Length Determination Instrument for Screws up to 40 mm



03.20040.025
Screwdriver, hex 2.5 mm, L 200/85 mm




self-holding



PEDUS-R

Locking Calcaneus / Universal Plates

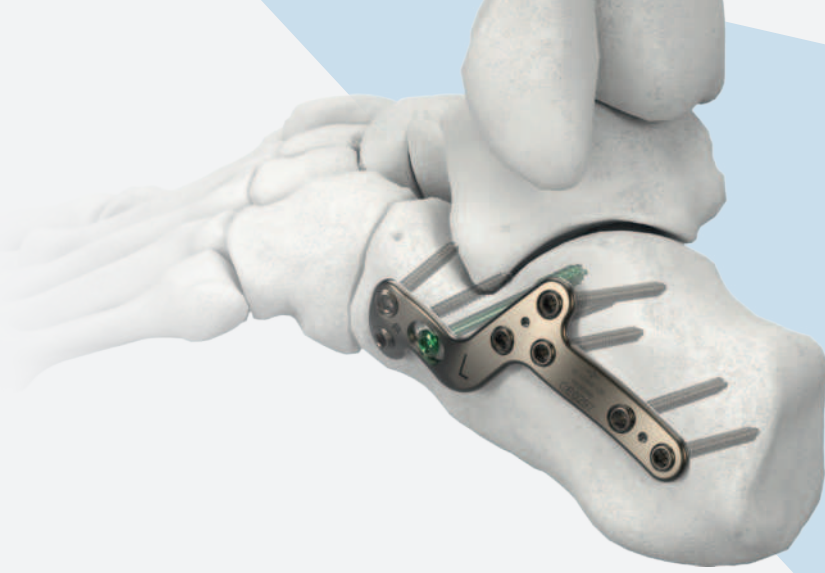

12.11260.XXXS
PEDUS-R MIS Calcaneus Plate



12.11241.XXX(S)
PEDUS-R Locking Calcaneus Plate



12.11123.XXX(S)
PEDUS-R Locking Universal Plate



03.03527.XXX(S)
Cortical Screw Ø 2.7 mm



03.05527.XXX(S)
Locking Cortical Screw Ø 2.7 mm



03.03612.XXX(S)
Cortical Screw Ø 3.5 mm



03.05612.XXX(S)
Locking Cortical Screw Ø 3.5 mm



03.05640.XXXS
Locking Cancellous Bone Screw
Ø 4.0 mm



02.20060.027
Double Drill Guide 2.7/2.0



10.20060.047
Drill Guide 2.0, scaled



03.20060.015
Drill Guide 2.0 for Locking Plates



03.20060.025
Double Drill Guide 3.5/2.5



14.40060.047
Drill Guide 2.5, scaled



03.20060.020
Drill Guide 2.5 for Locking Plates

10.20010.020
Drill Bit
ø 2.0 mm
L 112/82 mm

03.20011.120
Drill Bit
ø 2.0 mm
L 165/135 mm

14.40060.025
Drill Bit
ø 2.5 mm
L 112/82 mm

03.20011.125
Drill Bit
ø 2.5 mm
L 165/135 mm



03.20100.040
Length Determination Instrument for Screws up to 40 mm



03.20100.080
Length Determination Instrument for Screws up to 80 mm




03.20040.025
Screwdriver, hex 2.5 mm, L 200/85 mm



self-holding



Small Fragment Locking Reconstruction, One-third Tubular and Compression Plates



03.15130.XXX(S)
Locking One-third Tubular Plate 3.5



03.15114.XXX(S)
Locking Compression 3.5
undercut



06.15103.XXX(S)
Locking Reconstruction Plate 3.5
straight



03.03527.XXX(S)
Cortical Screw Ø 2.7 mm



03.05527.XXX(S)
Locking Cortical Screw Ø 2.7 mm



03.03612.XXX(S)
Cortical Screw Ø 3.5 mm



03.05612.XXX(S)
Locking Cortical Screw Ø 3.5 mm



02.20060.027
Double Drill Guide 2.7/2.0



10.20060.047
Drill Guide 2.0, scaled



03.20060.015
Drill Guide 2.0 for Locking Plates



03.20060.025
Double Drill Guide 3.5/2.5



14.40060.047
Drill Guide 2.5, scaled



03.20060.020
Drill Guide 2.5 for Locking Plates

10.20010.020
Drill Bit
ø 2.0 mm
L 112/82 mm

03.20011.120
Drill Bit
ø 2.0 mm
L 165/135 mm

14.40060.025
Drill Bit
ø 2.5 mm
L 112/82 mm

03.20011.125
Drill Bit
ø 2.5 mm
L 165/135 mm



03.20100.040
Length Determination Instrument for Screws up to 40 mm



03.20100.080
Length Determination Instrument for Screws up to 80 mm



03.20040.025
Screwdriver, hex 2.5 mm, L 200/85 mm



self-holding



Screws



Cortical Screw
Ø 2.7 mm

Titanium	Length
03.03527.006(S)	6 mm
03.03527.008(S)	8 mm
03.03527.010(S)	10 mm
03.03527.012(S)	12 mm
03.03527.014(S)	14 mm
03.03527.016(S)	16 mm
03.03527.018(S)	18 mm
03.03527.020(S)	20 mm
03.03527.022(S)	22 mm
03.03527.024(S)	24 mm
03.03527.026(S)	26 mm
03.03527.028(S)	28 mm
03.03527.030(S)	30 mm
03.03527.032(S)	32 mm
03.03527.034(S)	34 mm
03.03527.036(S)	36 mm
03.03527.038(S)	38 mm
03.03527.040(S)	40 mm
03.03527.042(S)	42 mm
03.03527.044(S)	44 mm
03.03527.046(S)	46 mm
03.03527.048(S)	48 mm
03.03527.050(S)	50 mm
Thread Diameter	2.70 mm
Drill Bit Diameter	2.00 mm
Head Diameter	5.00 mm
Hexagon Socket	2.50 mm
Material	Titanium





Locking Cortical Screw
Ø 2.7 mm

Titanium	Length
03.05527.010(S)	10 mm
03.05527.012(S)	12 mm
03.05527.014(S)	14 mm
03.05527.016(S)	16 mm
03.05527.018(S)	18 mm
03.05527.020(S)	20 mm
03.05527.022(S)	22 mm
03.05527.024(S)	24 mm
03.05527.026(S)	26 mm
03.05527.028(S)	28 mm
03.05527.030(S)	30 mm
03.05527.032(S)	32 mm
03.05527.034(S)	34 mm
03.05527.036(S)	36 mm
03.05527.038(S)	38 mm
03.05527.040(S)	40 mm
03.05527.042(S)	42 mm
03.05527.044(S)	44 mm
03.05527.046(S)	46 mm
03.05527.048(S)	48 mm
03.05527.050(S)	50 mm
03.05527.052(S)	52 mm
03.05527.054(S)	54 mm
03.05527.056(S)	56 mm
03.05527.058(S)	58 mm
03.05527.060(S)	60 mm
Thread Diameter	2.70 mm
Drill Bit Diameter	2.00 mm
Head Diameter	4.75 mm
Hexagon Socket	2.50 mm
Material	Titanium



ML Cortical Screw
Ø 2.7 mm

Titanium	Length
03.03540.008(S)	8 mm
03.03540.010(S)	10 mm
03.03540.012(S)	12 mm
03.03540.014(S)	14 mm
03.03540.016(S)	16 mm
03.03540.018(S)	18 mm
03.03540.020(S)	20 mm
03.03540.022(S)	22 mm
03.03540.024(S)	24 mm
03.03540.026(S)	26 mm
03.03540.028(S)	28 mm
03.03540.030(S)	30 mm
03.03540.032(S)	32 mm
03.03540.034(S)	34 mm
03.03540.036(S)	36 mm
Thread Diameter	2.70 mm
Drill Bit Diameter	2.00 mm
Head Diameter	4.75 mm
Hexagon Socket	2.50 mm
Material	Titanium

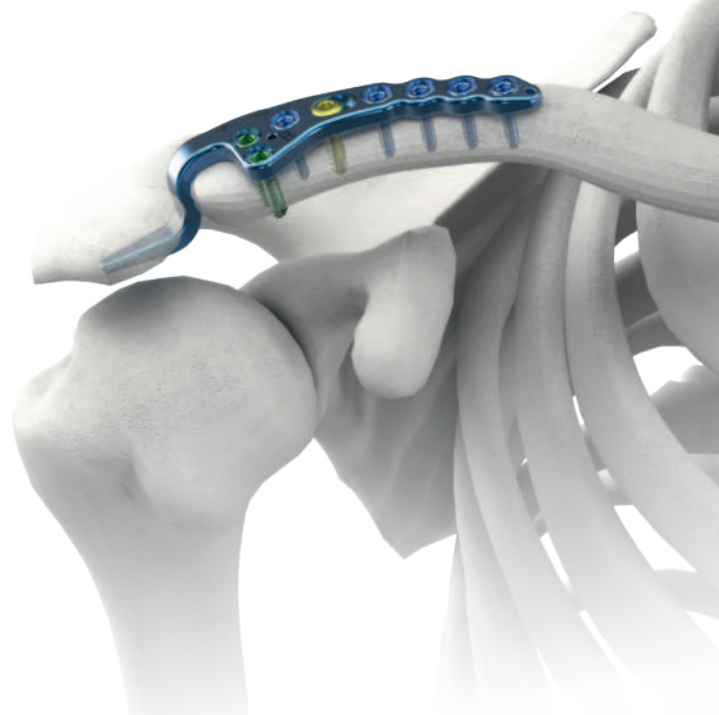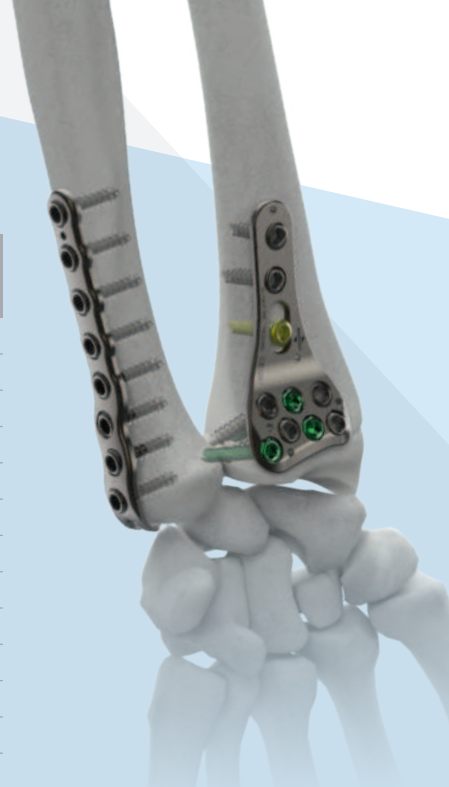

Screws



Cortical Screw
Ø 3.5 mm

Titanium	Length
03.03612.010(S)	10 mm
03.03612.012(S)	12 mm
03.03612.014(S)	14 mm
03.03612.016(S)	16 mm
03.03612.018(S)	18 mm
03.03612.020(S)	20 mm
03.03612.022(S)	22 mm
03.03612.024(S)	24 mm
03.03612.026(S)	26 mm
03.03612.028(S)	28 mm
03.03612.030(S)	30 mm
03.03612.032(S)	32 mm
03.03612.034(S)	34 mm
03.03612.036(S)	36 mm
03.03612.038(S)	38 mm
03.03612.040(S)	40 mm
03.03612.042(S)	42 mm
03.03612.044(S)	44 mm
03.03612.046(S)	46 mm
03.03612.048(S)	48 mm
03.03612.050(S)	50 mm
03.03612.055(S)	55 mm
03.03612.060(S)	60 mm
03.03612.065(S)	65 mm
03.03612.070(S)	70 mm
03.03612.075(S)	75 mm
03.03612.080(S)	80 mm
03.03612.085(S)	85 mm
03.03612.090(S)	90 mm
03.03612.095(S)	95 mm
03.03612.100(S)	100 mm
03.03612.105(S)	105 mm
03.03612.110(S)	110 mm
Thread Diameter	3.50 mm
Drill Bit Diameter	2.50 mm
Head Diameter	6.00 mm
Hexagon Socket	2.50 mm
Material	Titanium



Locking Cortical Screw
Ø 3.5 mm

Titanium	Length
03.05612.010(S)	10 mm
03.05612.012(S)	12 mm
03.05612.014(S)	14 mm
03.05612.016(S)	16 mm
03.05612.018(S)	18 mm
03.05612.020(S)	20 mm
03.05612.022(S)	22 mm
03.05612.024(S)	24 mm
03.05612.026(S)	26 mm
03.05612.028(S)	28 mm
03.05612.030(S)	30 mm
03.05612.032(S)	32 mm
03.05612.034(S)	34 mm
03.05612.036(S)	36 mm
03.05612.038(S)	38 mm
03.05612.040(S)	40 mm
03.05612.042(S)	42 mm
03.05612.044(S)	44 mm
03.05612.046(S)	46 mm
03.05612.048(S)	48 mm
03.05612.050(S)	50 mm
03.05612.052(S)	52 mm
03.05612.054(S)	54 mm
03.05612.056(S)	56 mm
03.05612.058(S)	58 mm
03.05612.060(S)	60 mm
03.05612.065(S)	65 mm
03.05612.070(S)	70 mm
03.05612.075(S)	75 mm
03.05612.080(S)	80 mm
Thread Diameter	3.50 mm
Drill Bit Diameter	2.50 mm
Head Diameter	4.75 mm
Hexagon Socket	2.50 mm
Material	Titanium



Locking Cancellous Bone Screw
Ø 4.0 mm

Titanium	Length
03.05640.020S	20 mm
03.05640.022S	22 mm
03.05640.024S	24 mm
03.05640.026S	26 mm
03.05640.028S	28 mm
03.05640.030S	30 mm
03.05640.032S	32 mm
03.05640.034S	34 mm
03.05640.036S	36 mm
03.05640.038S	38 mm
03.05640.040S	40 mm
03.05640.042S	42 mm
03.05640.044S	44 mm
03.05640.046S	46 mm
03.05640.048S	48 mm
03.05640.050S	50 mm
03.05640.052S	52 mm
03.05640.054S	54 mm
03.05640.056S	56 mm
03.05640.058S	58 mm
03.05640.060S	60 mm
03.05640.065S	65 mm
03.05640.070S	70 mm
03.05640.075S	75 mm
03.05640.080S	80 mm
Thread Diameter	4.00 mm
Drill Bit Diameter	2.50 mm
Head Diameter	4.75 mm
Hexagon Socket	2.50 mm
Material	Titanium



WINSTA-C Locking Clavicle Plates



WINSTA-C Clavicle Plate, S-Shaped, Minimum Bend

Implants	Templates
14.15100.XXX(S)	14.25100.XXX
right / left	right / left
Screw Holes Shaft 6, 8, 10	Screw Holes Shaft 6, 8, 10



WINSTA-C Clavicle Plate, J-Shaped

Implantat	Templates
14.15100.X09(S)	14.25100.X09
right / left	right / left
Screw Holes Shaft 9	Screw Holes Shaft 9



WINSTA-C Clavicle Plate, S-Shaped, Medium Bend

Implants	Templates
14.15101.XXX(S)	14.25101.XXX
right / left	right / left
Screw Holes Shaft 6, 8, 10	Screw Holes Shaft 6, 8, 10



WINSTA-C Clavicle Plate, lateral

Implants	Templates
14.15103.XXX(S)	14.25103.XXX
right / left	right / left
Screw Hole Shaft Head 5	Screw Hole Shaft Head 5
Screw Holes Shaft 5, 7, 9	Screw Holes Shaft 5, 7, 9




WINSTA-C Clavicle Plate, S-Shaped, Maximum Bend

Implants	Templates
14.15102.XXX(S)	14.25102.XXX
right / left	right / left
Screw Holes Shaft 6, 8, 10	Screw Holes Shaft 6, 8, 10




WINSTA-C Clavicle Hook Plate

Implants	Templates
14.1510X.XXX(S)	14.2510X.XXX
right / left	right / left
Screw Holes Head 3	Screw Holes Head 3
Screw Holes Shaft 3, 5	Screw Holes Shaft 3, 5
Hook Depth 12, 15, 18 mm	Hook Depth 12, 15, 18 mm

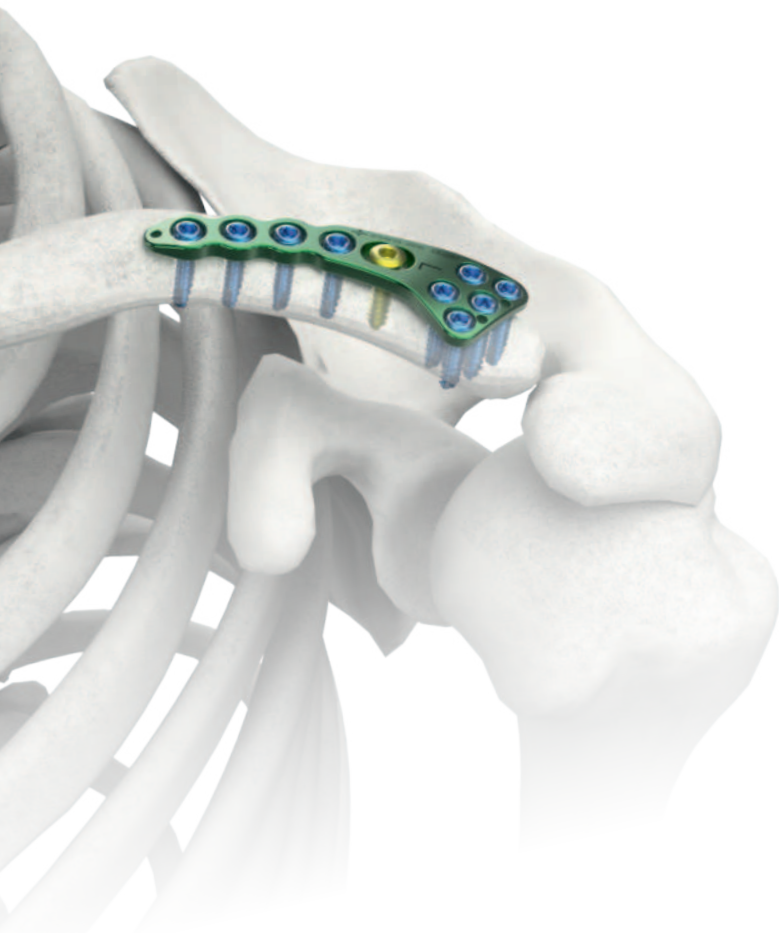

WINSTA-PH2 Locking Proximal Humeral Plates

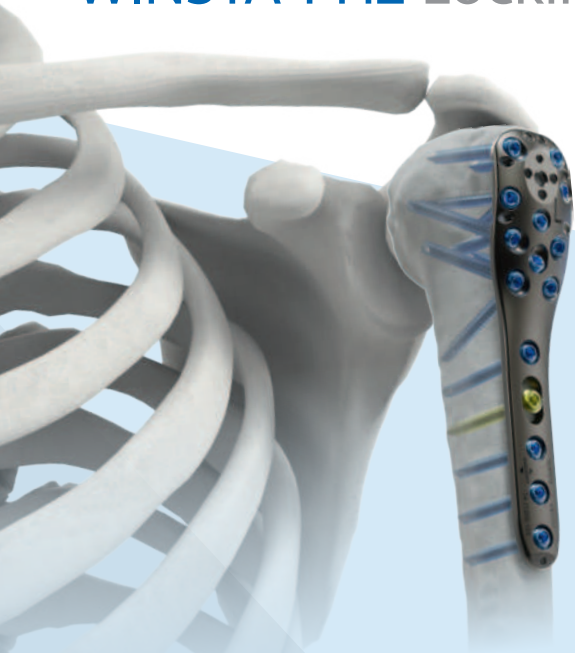

WINSTA-PH2 Proximal Humeral Plate

Implants

14.11200.XXXS

right / left

Screw Holes Head 10

Screw Holes Shaft 3, 5, 7, 10, 12, 14, 17

Length 85-269 mm

WINSTA-E Locking Elbow / Olecranon Plates



WINSTA-E Distal Humeral Plate, medial

Implants

15.15100.XXXS

right / left

Screw Hole Shaft 8, 10, 12, 14

Length 87, 111, 137, 161 mm

Templates

15.25100.XXX

right / left

Screw Hole Shaft 8, 12

Length 87, 137 mm



WINSTA-E Distal Humeral Plate, lateral

Implants

15.15102.XXXS

right / left

Screw Hole Shaft 4, 6, 8

Length 83, 107, 135 mm


Templates

15.25102.004

right / left

Screw Hole Shaft 4

Length 83 mm



WINSTA-E Distal Humeral Plate, posterolateral

Implants

15.15103.XXXS

right / left

Screw Hole Shaft 3, 5, 7, 9

Length 92, 115, 140, 162 mm

Templates

15.25103.XXX

right / left

Screw Hole Shaft 3, 7

Length 92, 140 mm



WINSTA-E Olecranon Plate

Implants

15.15200.XXXS

right / left

Screw Hole Shaft 3, 5, 7, 9

Length 81, 105, 132, 156 mm


Templates

15.25200.XXX

right / left

Screw Hole Shaft 3, 7

Length 81, 132 mm

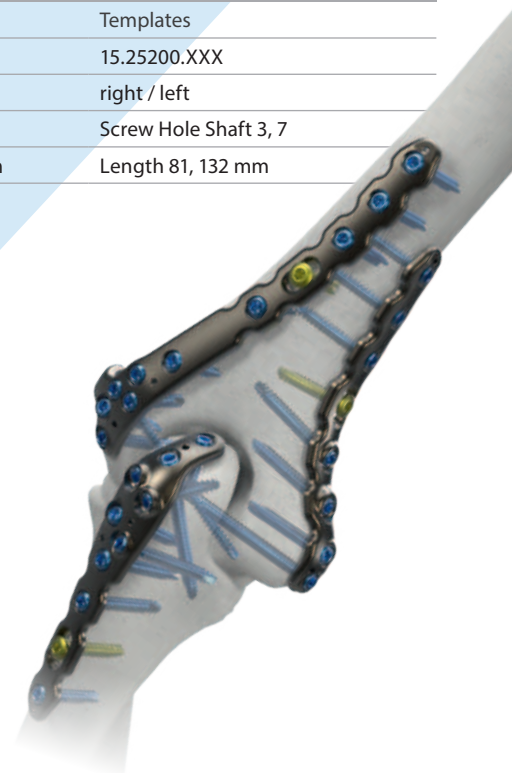

WINSTA-R Locking Distal Radius Plates



WINSTA-R Distal Radius Plate, 3-Hole

Implants	Templates
10.11915.1XX(S) right	10.21915.1XX right
10.11915.2XX(S) left	10.21915.2XX left
Screw Hole Head 3	Screw Hole Head 3
Screw Holes Shaft 2, 4	Screw Holes Shaft 2, 4
Length 45, 60 mm	Length 45, 60 mm



WINSTA-R Distal Radius Plate, 4-Hole

Implants	Templates
10.11915.3XX(S) right	10.21915.3XX right
10.11915.4XX(S) left	10.21915.4XX left
Screw Hole Head 4	Screw Hole Head 4
Screw Holes Shaft 2, 4, 8, 16	Screw Holes Shaft 2, 4
L. 45, 60, 90, 164 mm	Length 45, 60 mm



WINSTA-R Distal Radius Plate, 5-Hole

Implants	Templates
10.11915.6XX(S) right	10.21915.6XX right
10.11915.5XX(S) left	10.21915.5XX left
Screw Hole Head 5	Screw Hole Head 5
Screw Holes Shaft 2, 4, 8	Screw Holes Shaft 2, 4
Length 45, 60, 90 mm	Length 45, 60 mm



WINSTA-R Distal Radius Plate, 6-Hole

Implants	Templates
10.11915.8XX(S) right	10.21915.8XX right
10.11915.7XX(S) left	10.21915.7XX left
Screw Hole Head 6	Screw Hole Head 6
Screw Holes Shaft 2, 4, 8	Screw Holes Shaft 2, 4
Length 45, 60, 93 mm	Length 45, 60 mm



WINSTA-R Distal Radius Plate, 7-Hole

Implants	Templates
10.11917.0XX(S) right	10.21917.0XX right
10.11917.1XX(S) left	10.21917.1XX left
Screw Hole Shaft 7	Screw Hole Shaft 7
Screw Holes Shaft 2, 4	Screw Holes Shaft 2, 4
Length 49, 60 mm	Length 49, 60 mm



WINSTA-R Distal Radius Plate, 7-Hole, narrow

Implants	Templates
10.11917.2XX(S) right	10.21917.2XX right
10.11917.3XX(S) left	10.21917.3XX left
Screw Hole Shaft 7	Screw Hole Shaft 7
Screw Holes Shaft 2, 4	Screw Holes Shaft 2, 4
Length 49, 60 mm	Length 49, 60 mm



WINSTA-R Distal Radius Plate, dorsal

Implants
10.11916.3XX(S) right
10.11916.4XX(S) left
Screw Hole Head 5
Screw Holes Shaft 2, 4
Length 45, 60 mm



WINSTA-R Distale Ulna Hakenplatte

Implants	Templates
10.11918.0XX(S) right	10.11918.006 right
10.11918.1XX(S) left	10.11918.106 left
Screw Holes Shaft 6, 8	Screw Holes Shaft 6
Length 47, 63 mm	Length 47 mm



WINSTA-R Distale Ulnaplatte

Implantat	Templates
10.11918.007(S) right	10.21918.007 right
10.11918.107(S) left	10.21918.107 left
Screw Holes Shaft 7	Screw Holes Shaft 7
Length 65 mm	Length 65 mm

WINSTA-FiT Locking Distal Fibula / Tibia Plates



WINSTA-FiT Distal Tibia Plate, medial

Implants	Templates
13.15100.XXXS	13.25100.XXX
right / left	right / left
Screw Hole Shaft 5, 7, 9, 11, 15	Screw Hole Shaft 5, 9
Length 95, 120, 150, 176, 227 mm	Length 95, 150 mm



WINSTA-FiT Distal Tibia Plate, posterior

Implants	Templates
13.15300.XXXS	13.25300.003
right / left	right / left
Screw Hole Shaft 3, 6	Screw Hole Shaft 3
Length 49, 87 mm	Length 49 mm



WINSTA-FiT Distal Tibia Plate, anterolateral

Implants	Templates
13.15200.XXXS	13.25200.XXX
right / left	right / left
Screw Hole Shaft 5, 7, 9, 11, 15	Screw Hole Shaft 5, 9
Length 88, 116, 147, 174, 229 mm	Length 88, 147 mm



WINSTA-FiT Distal Fibula Plate, lateral

Implants	Templates
13.15500.XXXS	13.25500.XXX
right / left	right / left
Screw Hole Shaft 4, 5, 6, 8, 10	Screw Hole Shaft 4, 6
Length 79, 91, 104, 132, 156 mm	Length 79, 104 mm



PEDUS Locking Fore- / Midfoot Plates



PEDUS-L Locking Lapidus Plate

Implants

12.11123.00X(S)

Screw Hole Shaft 4

Steps 0, 2, 3, 4, 5 mm

Length 31 mm



PEDUS-L Locking Plantar Lapidus Plate

Implants

12.11124.XXX(S)

Screw Hole Shaft 4

Steps 3, 5 mm

Length 39, 45 mm

Templates

12.21124.XXX

Screw Hole Shaft 4

Steps 3, 5 mm

Length 39, 45 mm



PEDUS Locking T-Plate

Implants

12.11210.XXX(S)

Screw Hole Shaft 2

Screw Holes Shaft 3, 4, 6

Length 32, 39, 54 mm

Templates

12.21210.003

Screw Hole Shaft 2

Screw Holes Shaft 3

Length 32 mm



PEDUS Locking Plate, straight

Implants

12.11211.XXX(S)

Screw Hole Shaft 4, 6, 8

Length 30, 43, 56 mm

Templates

12.21211.004

Screw Hole Shaft 4

Length 30 mm



PEDUS Locking L-Plate, 90°

Implants

12.11212.XXX(S)

right / left

Screw Hole Shaft 2

Screw Holes Shaft 3, 4, 6

Length 32, 40, 55 mm

Templates


12.21212.XXX

right / left

Screw Hole Shaft 2

Screw Holes Shaft 3

Length 32 mm



PEDUS-Lx Compression Plate

Implants

12.11230.XXXS

right / left

Valgus-Angle 5°, 9°

Length 37.50 mm

Templates

12.21230.XXX

right / left

Valgus-Angle 5°, 9°

Length 37.50 mm



PEDUS MTP 1 Arthrodesis Plate, short

Implants

12.1125X.XXXS

right / left

Screw Hole Shaft 2

Screw Holes Shaft 3

Dorsal Extension 0°, 8°

Valgus-Angle 5°

Length 37 mm

Templates

12.2125X.XXX

right / left

Screw Hole Shaft 2

Screw Holes Shaft 3

Dorsal Extension 0°, 8°

Valgus-Angle 5°

Length 37 mm



PEDUS MTP 1 Arthrodesis Plate

Implants

12.1125X.XXX(S)

right / left

Screw Hole Shaft 3

Screw Holes Shaft 3, 5

Dorsal Extension 0°, 8°

Valgus-Angle 5°

Length 53, 69 mm

Templates

12.2125X.XXX

right / left

Screw Hole Shaft 3

Screw Holes Shaft 3, 5

Dorsal Extension 0°, 8°

Valgus-Angle 5°

Length 53, 69 mm



PEDUS Locking Multifix Plate

Implantat

12.11018.007(S)

Screw Hole Shaft 7

Durchmesser 18 mm

Templates

12.21018.007

Screw Hole Shaft 7

Durchmesser 18 mm



PEDUS Locking X-Plate

Implants

12.11220.XXX(S)

Screw Hole Shaft 4

Length 27, 33 mm

Templates

12.21220.XXX

Screw Hole Shaft 4

Length 27, 33 mm

PEDUS-R Locking Calcaneus / Universal Plates



PEDUS-R MIS Calcaneus Plate	
Implants	Templates
12.11260.XXXS	12.21260.XXX
right / left	right / left
Screw Hole Shaft 8	Screw Hole Shaft 8
Length 61, 66 mm	Length 61, 66 mm




PEDUS-R Locking Calcaneus Plate	
Implants	
12.11241.XXX(S)	
right / left	
Screw Hole Shaft x	
Length 60, 70, 80 mm	




PEDUS-R Locking Universal Plate	
Implants	
12.11123.0XX(S)	
right / left	
Screw Hole Shaft 4, 6, 8, 12	
Length 23.5, 45, 55, 76 mm	

Small Fragment


WS Reconstruction, One-third Tubular, Compression Plates

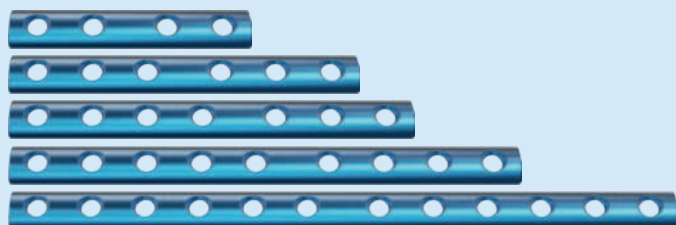


Locking One-third Tubular Plate 3.5	
Implants	
03.15130.XXX(S)	
Screw Hole Shaft 4, 5, 6, 7, 8, 9, 10, 12	
Length 52, 64, 76, 88, 100, 112, 124, 148 mm	

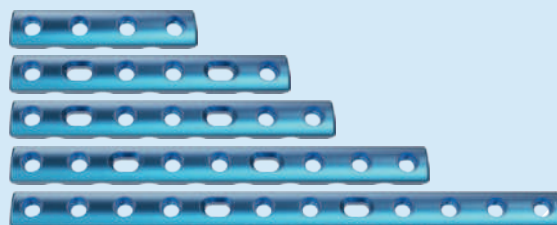

Locking Compression Plate 3.5 undercut	
Implants	
03.15114.XXX(S)	
Screw Hole Shaft 4, 5, 6, 7, 8, 9, 10, 12	
Length 51, 64, 77, 90, 103, 116, 129, 155 mm	

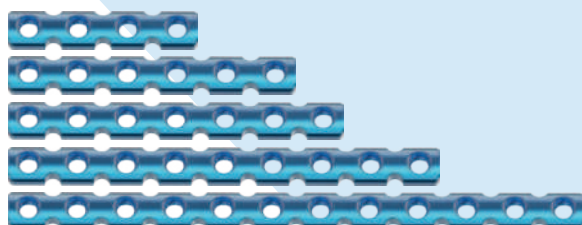

Locking Reconstruction Plate 3.5 straight	
Implants	
06.15103.XXX(S)	
Screw Hole Shaft 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 18	
Length 34, 46, 58, 70, 82, 94, 106, 118, 130, 142, 154, 166, 178, 190, 214 mm	

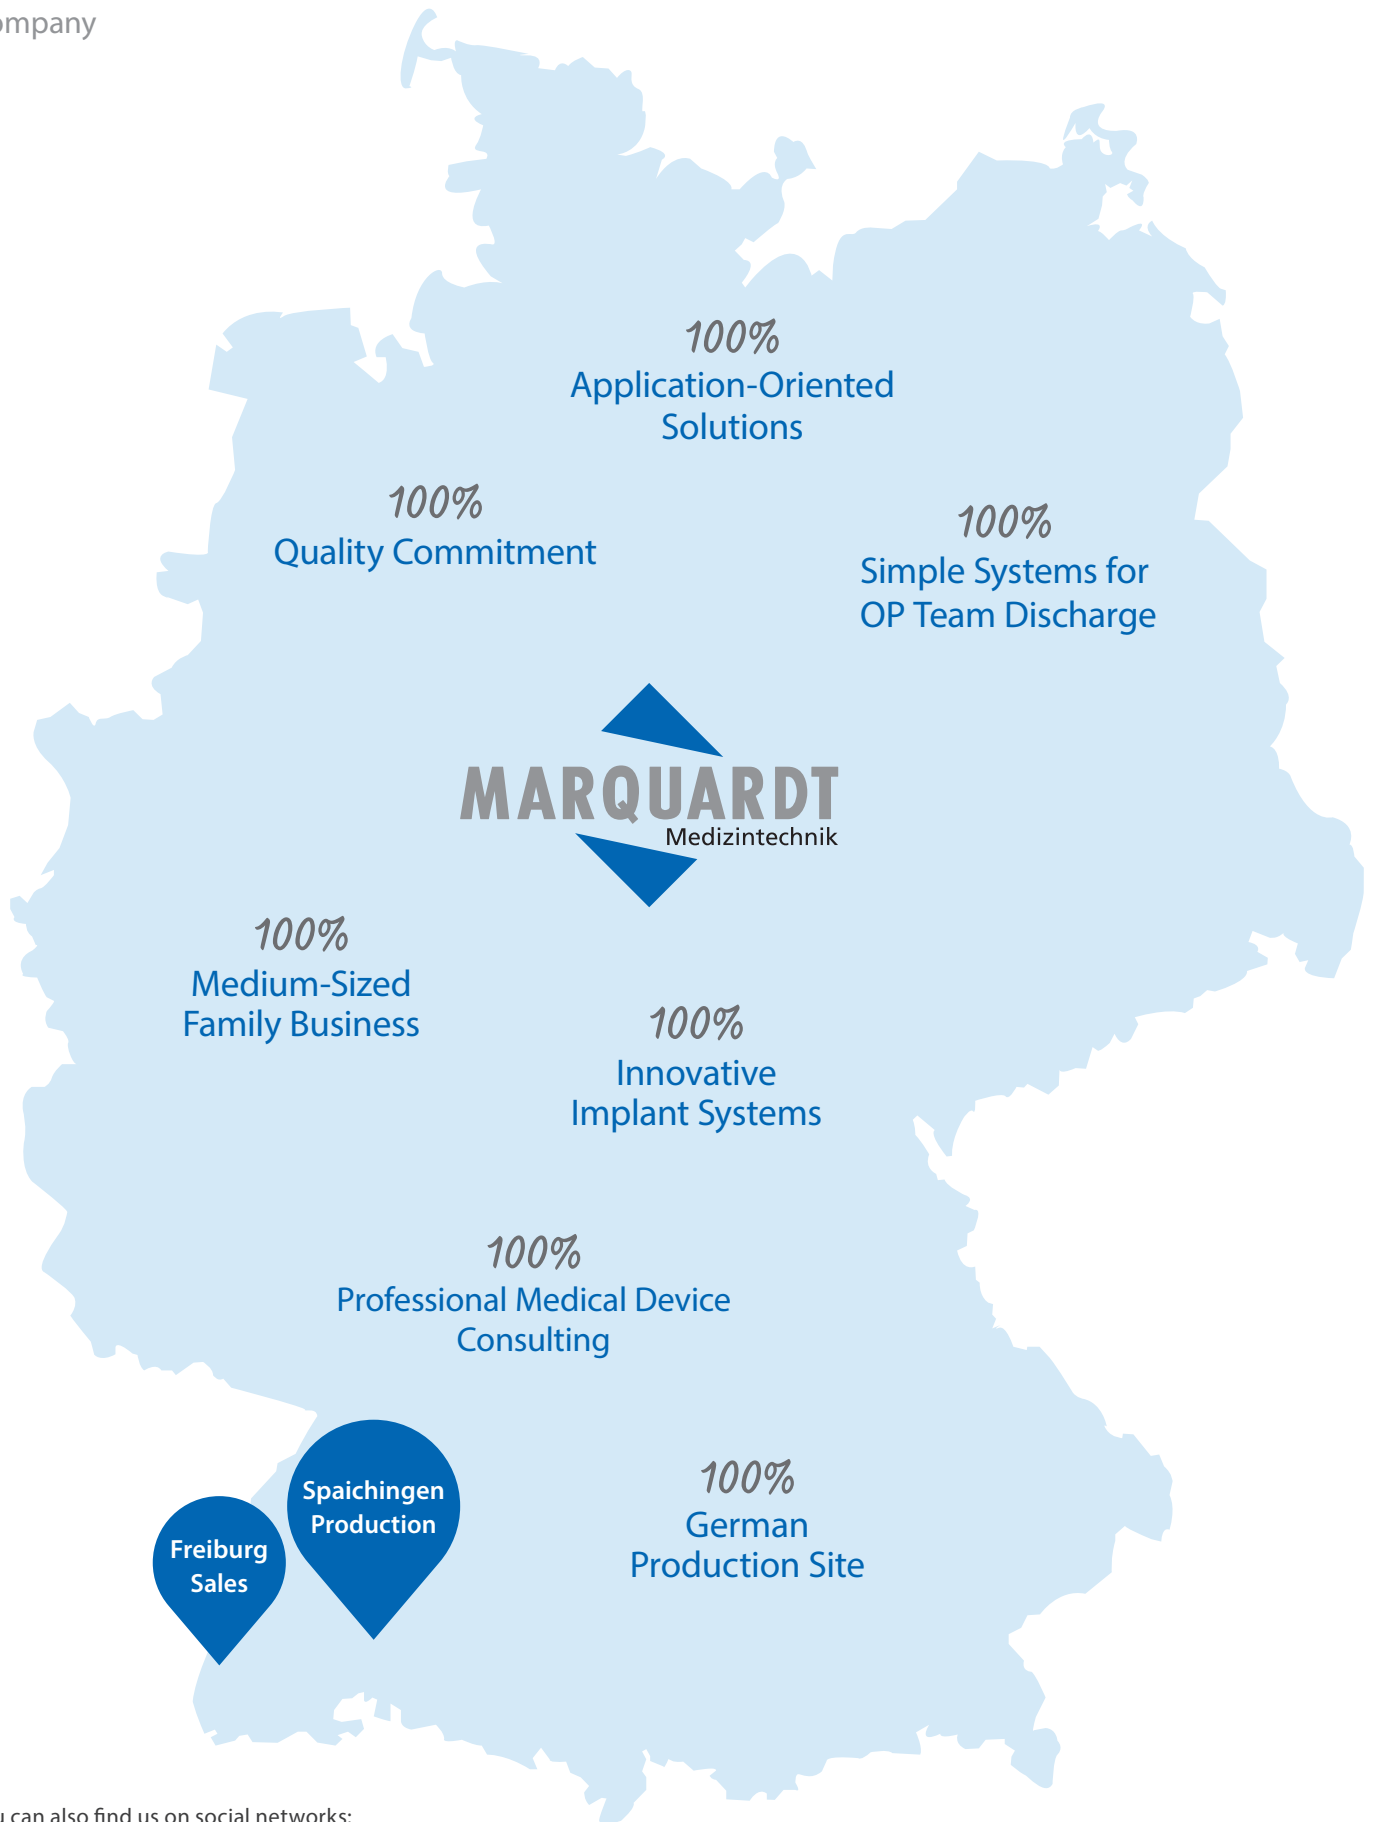

You can also find us on social networks:



Note:

This description is not sufficient for immediate application of the instruments. Further information is available in the detailed surgical technique.

Maintenance, care and preparation of Marquardt instruments can be found in the corresponding instructions.